

Technologies Available for LICENSING

OFFICE OF TECHNOLOGY LICENSING

https://licensing.research.gatech.edu | techlicensing@gtrc.gatech.edu

Vapor Phase Infiltration Produces Solar Cells with **Greater Thermal Stability**

Increasing stability of perovskite solar cells during thermal cycling

To answer the market demand for alternative energy solutions, innovators have worked swiftly to develop perovskite solar cells (PSCs) for commercialization. Yet, one significant barrier remains: stability. The PSCs' instability, which critically diminishes its product lifetime, can be caused by breakdowns within its organic charge transport layers. The crystallization of the layers' performance-enhancing oxidized hole-transporting materials, such as spiro-OMeTAD molecules, in the hole transport layer (HTL) is one of the ways the product undermines itself while operational. Although the perovskite layer can endure temperatures as high as 120 °C, the spiro-OMeTAD layer may start crystallizing after multiple heating cycles at only 70 °C.

Transforming PSCs' film into hybrid organic-inorganic material results in improved stability and efficiency

Vapor Phase Infiltration (VPI) can yield superior thermal stability in PSCs by reducing the cracks and delamination of HTL caused by crystallization at low temperatures. This method effectively infiltrates spiro-OMeTAD with titanium oxide/hydroxide (TiOx) clusters and transforms the layers into a hybrid organicinorganic material. The converted material limits the crystallization of spiro-OMeTAD that occurs while PSCs are operational. As a result, the main cause of degradation in PSCs is removed.

VPI-manufactured PSCs have demonstrated double the power conversion efficiency of basic PSCs upon testing over several hours at 75 °C. With advanced PSCs able to take on greater operational stress with less degradation, the overall product lifespan is increased for a relatively low cost and primes this product for commercialization success.

Summary Bullets

- Stability: Decreasing spiro-OMeTAD crystallization improves thermal stability of hole transport layers within perovskite solar cells (PSCs)
- Longevity: Eliminating the main cause of PSCs' operational degradation increases the overall product lifespan

• Efficiency: Preventing the delamination of the layers transporting electronic charge has doubled the power conversion efficiency of modified PSCs

Solution Advantages

- **Stability**: Decreasing spiro-OMeTAD crystallization improves the thermal stability of hole transport layers within PSCs
- **Longevity**: Eliminating the main cause of PSCs' operational degradation increases the overall product lifespan at high temperatures
- **Efficiency**: Preventing the delamination of the layers transporting electronic charge has doubled the power conversion efficiency of modified PSCs

Potential Commercial Applications

- Solar power energy production, in particular perovskite solar cells
- Light emitting devices

Inventors

- Dr. Juan-Pablo Correa-Baena
 Assistant Professor Georgia Tech School of Materials Science and Engineering
- Andres-Felipe Castro-Mendez
 Graduate Research Assistant Georgia Tech School of Materials Science and Engineering
- Selma Fairach
 - Graduate Research Assistant Georgia Tech School of Materials Science and Engineering
- Dr. Mark Losego
 - Assistant Professor Georgia Tech School of Materials Science and Engineering
- Dr. Emily McGuinness
 - Graduate Research Assistant Georgia Tech School of Materials Science and Engineering
- Dr. Carlo Andrea Riccardo Perini
 - Postdoctoral Fellow Georgia Tech School of Material Science and Engineering
- Dr. Jamie Wooding
 - Doctoral Candidate Georgia Tech School of Materials Science and Engineering

IP Status

: US63/400102

Publications

Interface Reconstruction from Ruddlesden–Popper Structures Impacts Stability in Lead Halide Perovskite Solar Cells, Advanced Materials - October 17, 2022

Images

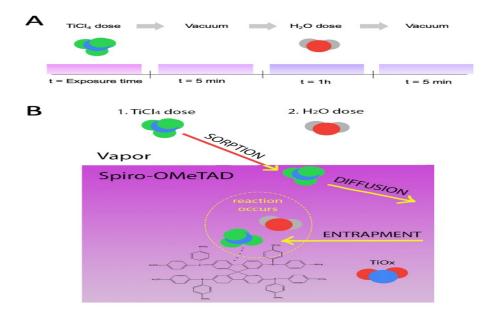


Figure 1(A) and (B) - Vapor Phase Infiltration of Spiro-OMeTAD

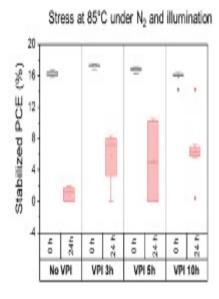


Figure 2 – Improvement of thermal stability of perovskite solar cells after vapor phase infiltration

MPPT at 75°C under $\,N_2$ and AM 1.5 illumination

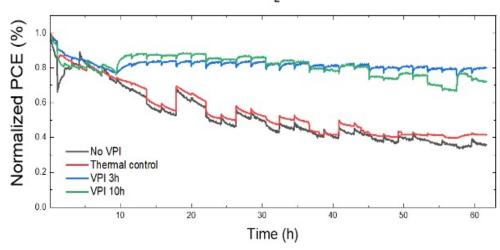


Figure 3 - Observed enhancement of efficiency of perovskite solar cells after vapor phase infiltration

Visit the Technology here:

Vapor Phase Infiltration Produces Solar Cells with Greater Thermal Stability

https://s3.sandbox.research.gatech.edu//print/pdf/node/3221