

# Incorporation of Phase Change Materials into Fibers

---

## **A process for incorporation of PCM into fibers through wet spinning-dry jet spinning of polymeric dopes**

Georgia Tech Inventors have discovered a process for incorporation of PCM into fibers through wet spinning-dry jet spinning of polymeric dopes. Microencapsulated PCM's are first incorporated into a polymeric dope through a series of high powered sonication and mixing using an impeller. A "Prime Dope" with the remaining solvent and an equivalent fraction of polymer is then introduced and additional sonication and mixing steps are carried out. The dope is completed when the remaining required polymer is added and stirred until fully incorporated. Once all polymer has been incorporated, the completed dope is loaded into the spinning system, and allowed to degas for 12 hours to remove any air bubbles. Fibers are produced through extruding the dope through a spinneret through a low air gap, then through a water bath and onto a take up drum. Solvent exchange in water is carried out daily for 3 days.

### **Summary Bullets**

- Improved thermally modulated fibers with high mass loading
- Implementing a heat/sink source directly into the fiber next to the sorbent material
- Enhanced pressure swing adsorption processes

### **Solution Advantages**

- Improved thermally modulated fibers with high mass loading
- Implementing a heat/sink source directly into the fiber next to the sorbent material
- Enhanced pressure swing adsorption processes
- Efficient process

### **Potential Commercial Applications**

- Ability to incorporate phase change materials into fiber polymeric contactors
- Allows for other materials to be introduced "next to" the phase change materials
- Applied towards the production of thermally modulated fiber material
- Use with thermal protection systems

### **Background and More Information**

Phase change materials (PCMs) can store and release large amounts of energy to maintain constant temperature. Compared to insulation materials, they change phases and absorb and release a large amount of energy. Various industries, such as construction, transportation, commercial refrigeration, textiles, and packaging require efficient heating and cooling. Therefore, PCMs are expected to be environment-friendly and energy-efficient.

## Inventors

- Dr. Matthew Realff  
Professor and David Wang Sr. Fellow - Georgia Tech School of Chemical and Biomolecular Engineering
- Dr. Yoshiaki Kawajiri  
Associate Professor - Georgia Tech School of Chemical and Biomolecular Engineering
- Dr. Ryan Lively  
Assistant Professor – Georgia Tech School of Chemical and Biomolecular Engineering
- Dr. Hectór Landa  
Postdoctoral Researcher – Georgia Tech School of Chemical and Biomolecular Engineering
- Stephen DeWitt  
Graduate student – Georgia Tech School of Chemical and Biomolecular Engineering


## IP Status


:

## Publications

[Publication- PCT application](#), -

## Images

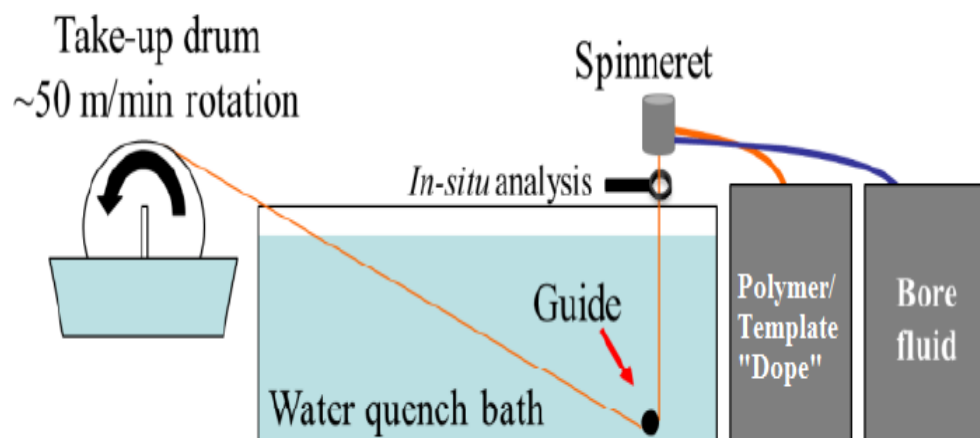

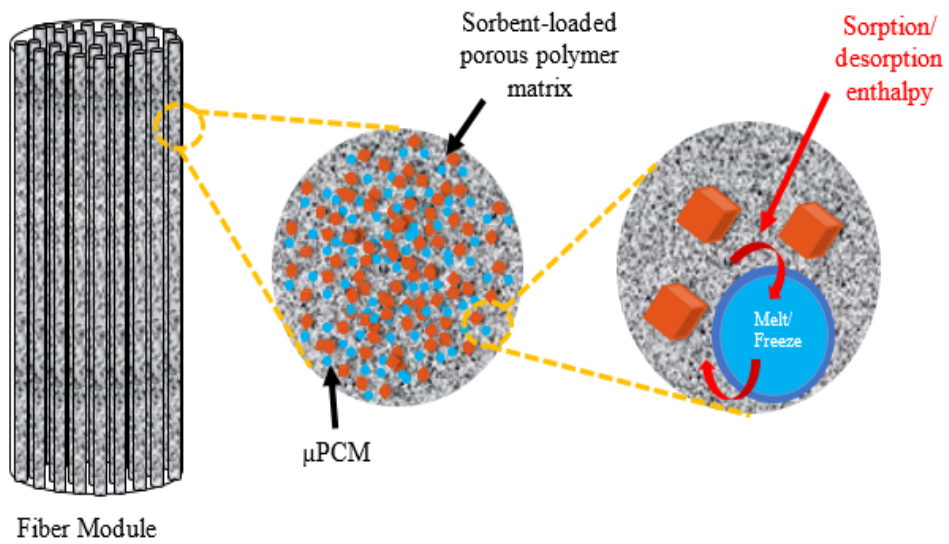

Visit the Technology here:

[Incorporation of Phase Change Materials into Fibers](https://s3.sandbox.research.gatech.edu//print/pdf/node/3705)

---

<https://s3.sandbox.research.gatech.edu//print/pdf/node/3705>